



CIRCUIT BREAKER IDENTIFICATION
 TYPE III - MANUAL RESET—RESETS WHEN EXTERNAL BUTTON IS PUSHED.
 TYPE II— RESETS WHEN OVERCURRENT IS CORRECTED OR REMOVED.


BATTERY FUSE NOTE:
 FUSE (100 AMP) MUST BE MOUNTED WITHIN 12" OF THE SOURCE. FUSE CTD PART NO. 22-02336-31 AND HOLDER 22-01800-00 SHOULD BE HOOKED UP WITH RED 2 GAUGE SGX WIRE CTD P/N 202-139.

D

C


B

A

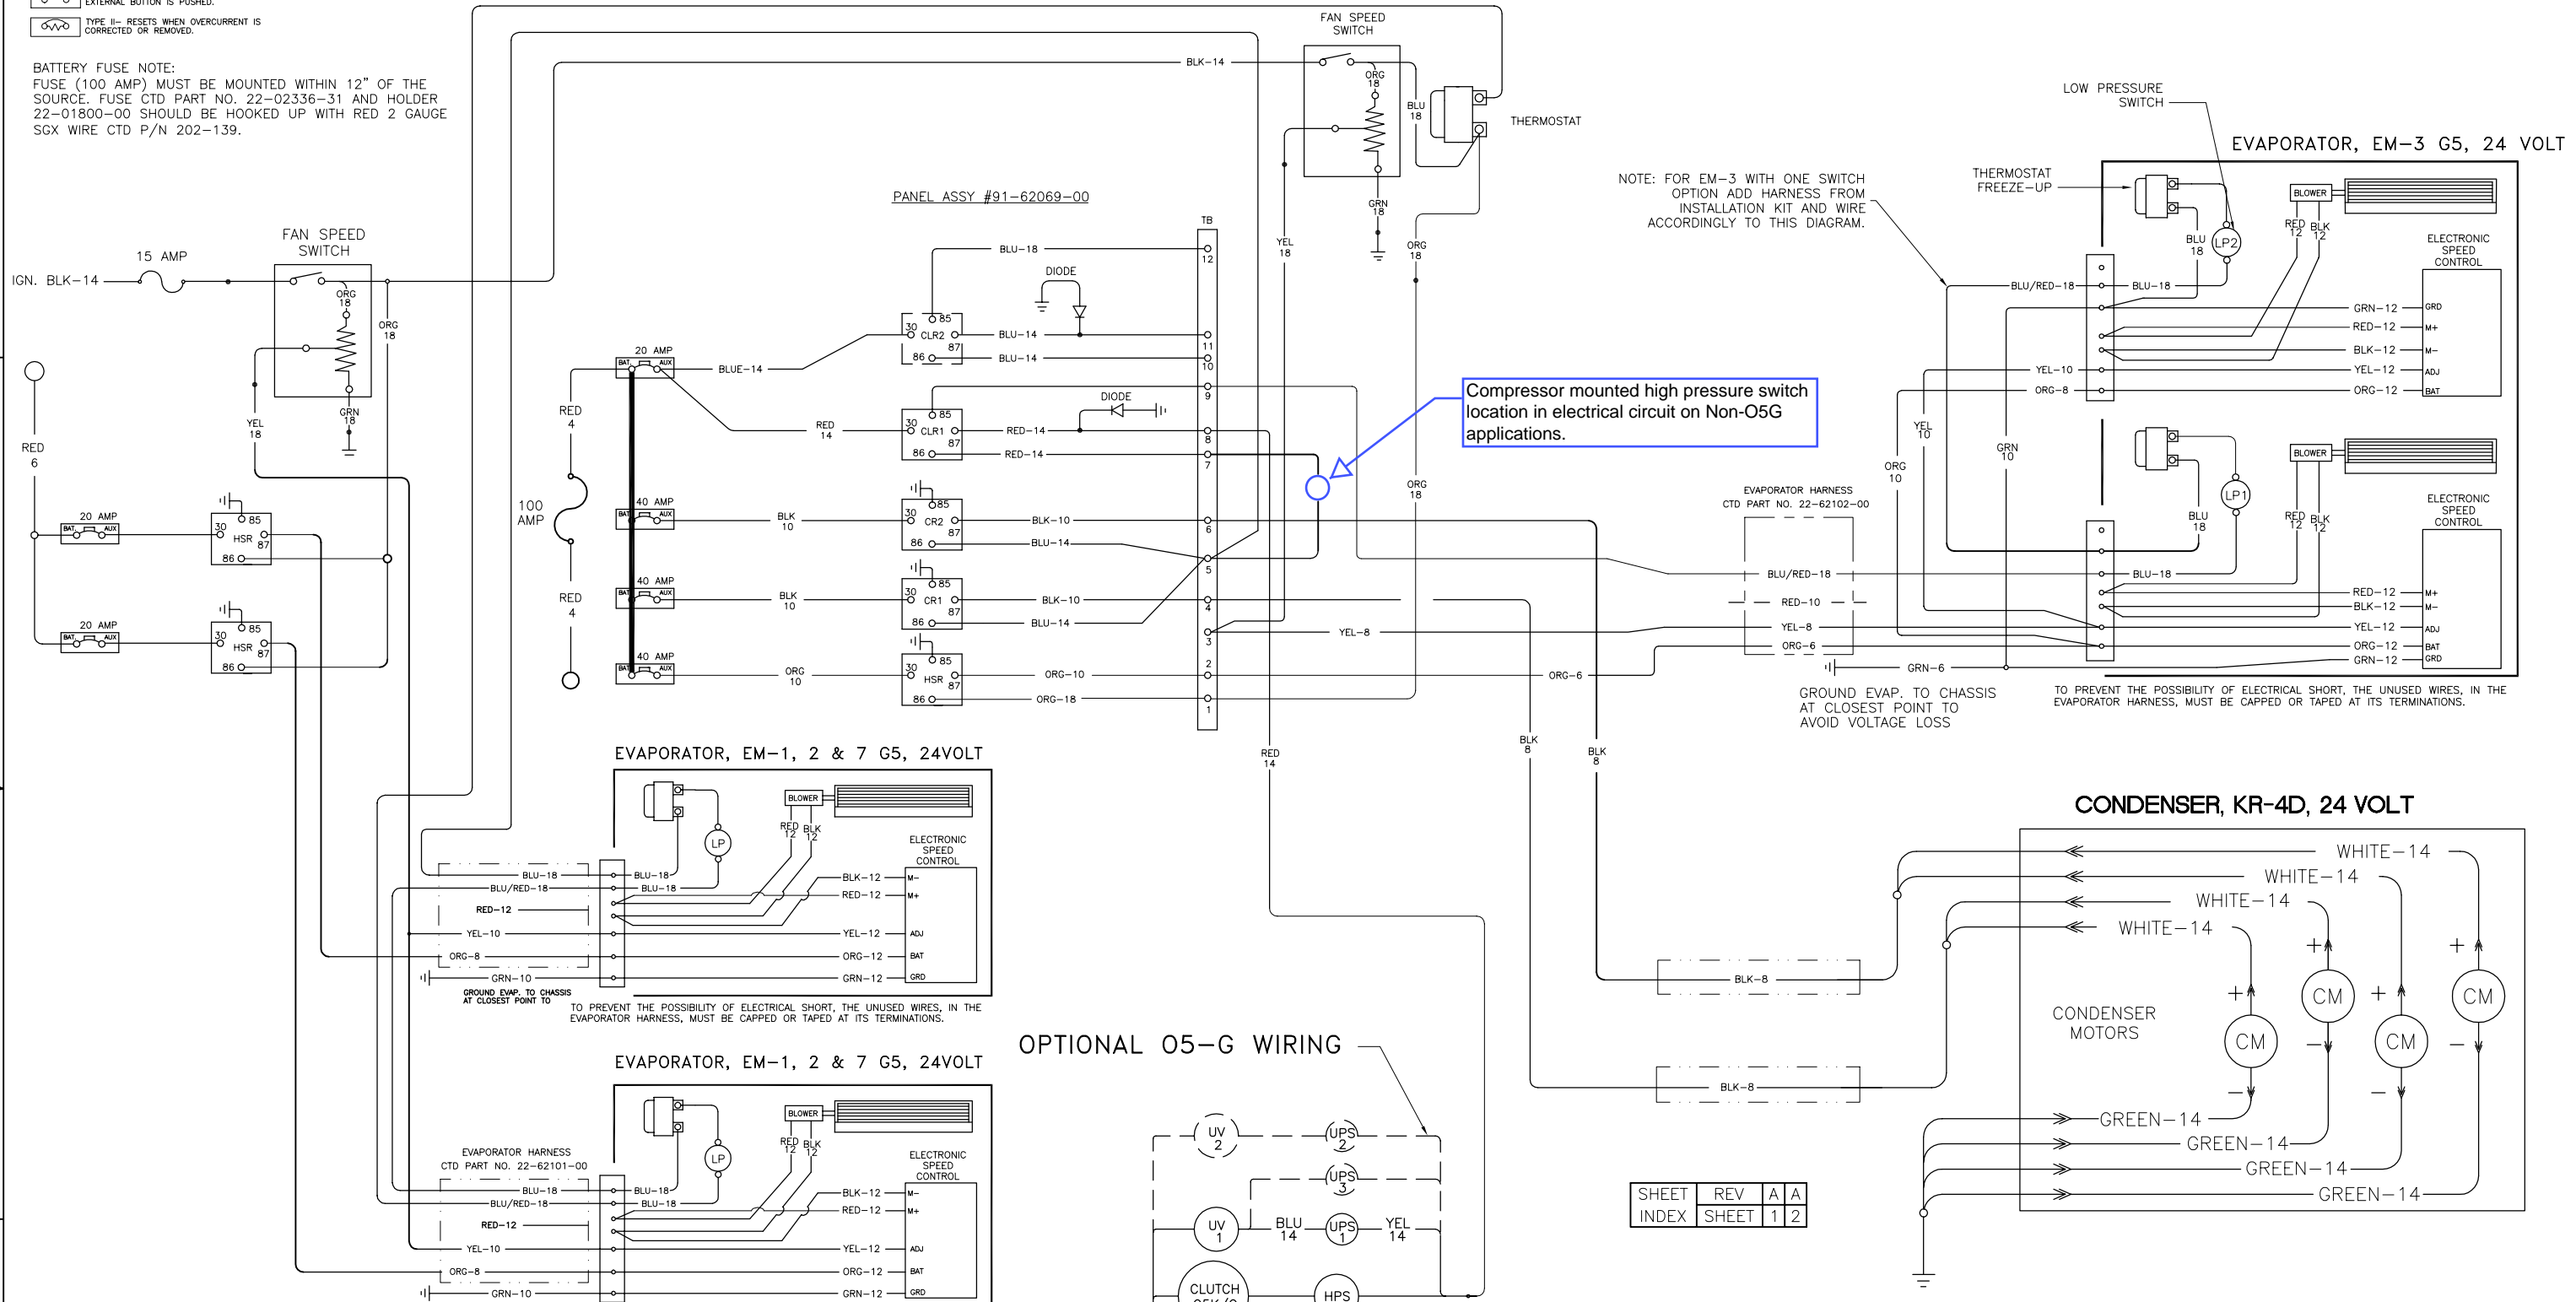



SHEET	REV	A	A
INDEX	SHEET	1	2

CAUTION: DO NOT INSTALL A/C ELECTRICAL PANEL IN AN AREA THAT IS NOT VENTILATED OR CAN EXCEED 150° F. OR 66° C.



A	INITIAL RELEASE	JAN 9, 2007	TDL	SB	68N419GP07
SYM	REVISION RECORD	DATE	BY	ENGR.	M.E.

CAD SYSTEM: AutoCAD	IMPERIAL INCH FORMAT: UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES, WITH METRIC CONVERSIONS IN [MILLIMETERS].	 Carrier A United Technologies Company Carrier Refrigeration Operations Carrier Transport A/C 50 GRUMBACHER ROAD York, Pennsylvania 17402 USA
THIRD ANGLE PROJECTION 	UNLESS OTHERWISE SPECIFIED TOLERANCES ON: .00 DEC .000 DEC DEC ANG ± .04 ± .020 ± ± 2° [.0] DEC [.00] DEC DEC ±[1.0] ±[.50] ± []	THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.
MATERIAL	SURFACES ✓ AA	TITLE WIRE DIAGRAM EM-3,(2)EM, KR-4/6. TM65 , 24V,VAR SPD
	HOLE DIA. ± .005 ±[.13]	SIZE D
	HOLE SPACING ±.015 ±[.38] NON-CUMULATIVE	DRAWING NO. KH-62718
	HOLE LOC ± .03 ±[.8]	REV A
	DIMENSIONS IN (PARENTHESIS) ARE FOR INFORMATION ONLY. TOLERANCES DO NOT APPLY.	SCALE FULL
WEIGHT	MFG/PURCH	NEXT DRAWING NONE
	MFG	SCALE FULL

REV 98-62718 DWG NO 98-62718 COMMODITY CODE